

SVP

BROADCAST
MICROWAVE

BIAS INSERTER TEE (BIAS-TEE)

MANUAL V1.0



Contents

1	Description	3
2	Technical features.....	4
2.1	BIAS-TEE.....	4
2.2	EGG y FGG Lemo connectors.....	4

List of figures

Figure 1.1	Bias Insertion Tee. BIAS-TEE	3
Figure 2.1	FGG Lemo male connector's size	5
Figure 2.2	EGG Lemo female connector's size.....	6

List of tables

Table 2.1	Bias Tee features.....	4
Table 2.2	Mechanical and climatic freatures	4
Table 2.3	Electrical features	4
Table 2.4	FGG male connector's physical features.....	5
Table 2.5	EGG female connector's physical features	5

1 Description

SVP Broadcast Microwave has designed a new the **Bias Tee**.

This element is very useful to give power supply to an equipment connected to the other end of the coaxial cable, as an LNA or a down-converter.

For it, it has a N male connector, a N female connector and a EGG lemo female connector. The N male connector should be connected to the receiver input and the N female connector to the LNA's RF output. The DC power inserted through the lemo connector, supporting a maximum of 30 V / 1A.

The cable with FGG lemo male connector that is used to insert the DC power is given with the bias insertion tee (BIAS-TEE) and with the COFDM low noise preamplifier.

This equipment is protected from short-circuits by means of an autoreseetable fuse.

The male connector and cable is not included.

In the following figure the bias insertion tee (BIAS-TEE) is showed, where the previously mentioned connections are appreciated:



Figure 1.1 Bias Insertion Tee. BIAS-TEE

2 Technical features

2.1 BIAS-TEE

Table 2.1 Bias Tee features

Item	Feature
Frequency range	From 10 to 3000 MHz
Insertion loss	0.3dB@1000MHz 0.8dB@2000MHz 0.8dB@3000MHz
Supply voltage range	From 0 to +30V DC
Maximum current	1A
DC input connector	LEMO 1B of 4 pins
RF&DC connector	N female, 50 Ohms
RF connector	N male, 50 Ohms
Size	Width: 50mm Height: 30mm (without connectors) Depth: 22mm

2.2 EGG y FGG Lemo connectors

Mechanical and climatic features

Table 2.2 Mechanical and climatic features

Item	Feature
Endurance	>5000 cycles
Humidity	up 95% to 60°C
Temperature range	-55°C, +250°C
Resistance to vibration	10-2000 Hz, 15g
Shock resistance	100 g, 6ms
Protection index	IP50
Climatical category	55/175/21

Electrical features

Table 2.3 Electrical features

Item	Feature
Shielding efficiency at 10 MHz	>75 dB
Shielding efficiency at 1 GHz	>40 dB

Physical features

Table 2.4 FGG male connector's physical features

Item	Feature
A	9.5 mm
L	35.0 mm
M	25.0 mm
S1	8.0 mm
S2	7 mm

Being A, L, M, S1 and S2 the dimensions that are shown in the following figure:

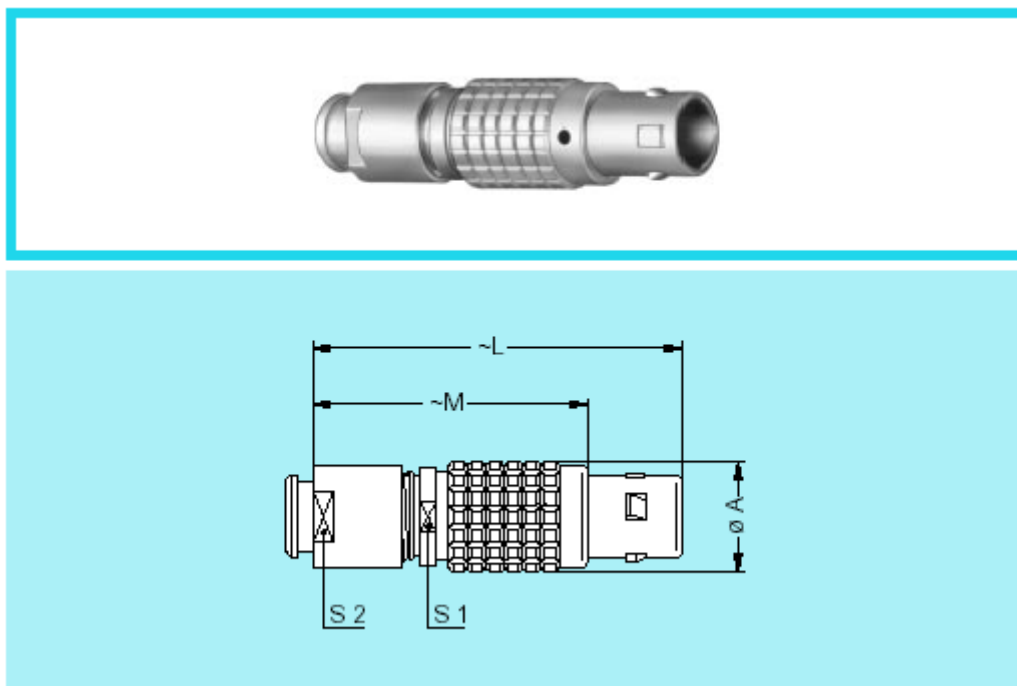


Figure 2.1 FGG Lemo male connector's size

Table 2.5 EGG female connector's physical features

Item	Feature
A	10 mm
B	12.5 mm
E	M9x0.6 mm
e	7.0 mm
L	20.7 mm
M	1.2 mm
N	19.1 mm
S1	8.2 mm
S3	11 mm

Being A, B, E, e, L, M, N, S1 and S3 the dimensions that are shown in the following figure:

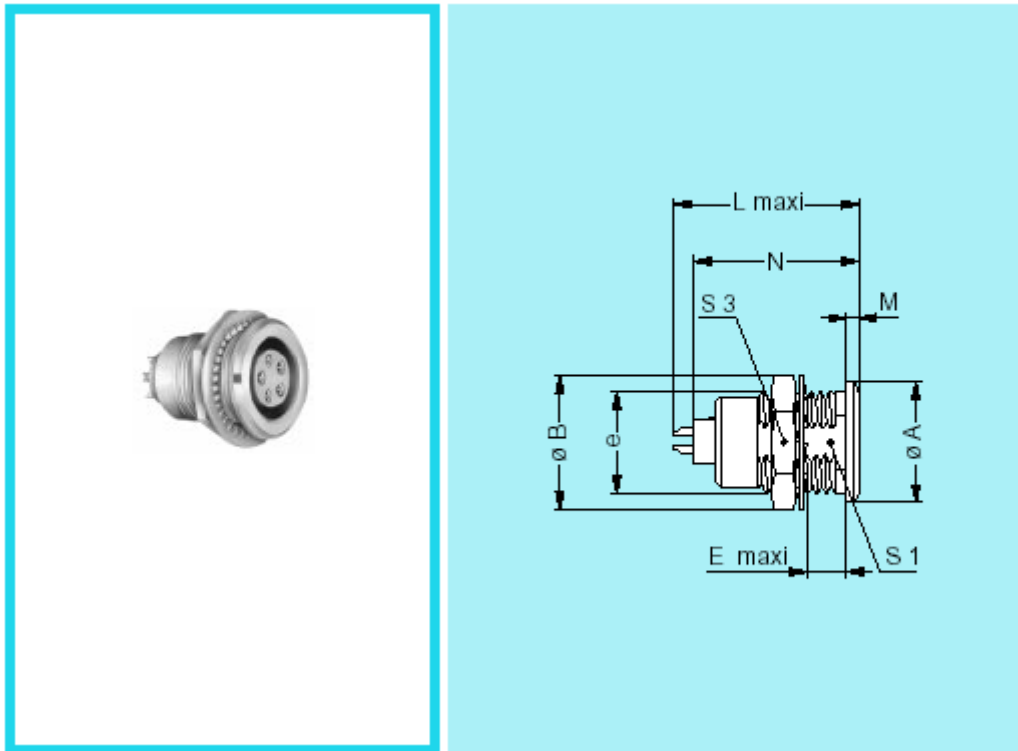


Figure 2.2 EGG Lemo female connector's size

NOTES:

End note

At SVP Broadcast Microwave S.L. we make a constant effort to continuously improve our equipments and models.

For that reason, please understand that there may be some changes in design, equipment and technology. Therefore, we cannot be held liable for the data, figures and descriptions given in this datasheet.

The datasheet's text, figures and standards are based on the information we had when the datasheet was published.

Reprinting, reproduction and translation of all or part of this datasheet is forbidden without written permission by SVP Broadcast Microwave S.L.

SVP Broadcast Microwave S.L. reserves all copyrights.

All right to make changes are reserved.

SVP Broadcast Microwave reserves the right to make changes to this user's guide and the device without prior warning.



C/Zubiaurre, 7 bajo
48215 Iurreta
Vizcaya – España

Tel: +34 94 620 3722
Fax: +34 94 620 4356

svpbm@svpbm.com
www.svpbm.com